



PRINT

- ALUMINIUM
- WOOD

A very powerful noise absorber that you can customize with the favourite image in aluminium or wooden frame.



ABSORPTION



LOW, MEDIUM & HIGH TONES

MUTE.





SIZES & THICKNESS mm +/- 3 mm

FRAME	MIN. SIZE	MAX. SIZE	THICKNESS
Aluminium	600 × 600	2200 × 3000	53
Wood	500 × 500	1000 × 2000	48

WEIGHTS kg

	ALUMINIUM	WOOD
Minimum	4,5	3,5
Maximum	26	10,7

FRAME OPTIONS


- 
11 Silver anodized aluminium
- 
12 Black anodized aluminium
- 
13 Standard natural oak
- 
14 Black-painted oak

COMPOSITION

- Fabrics of choice
- Melamine foam
- Oak wood frame / Aluminium frame and plastic corner plugs

FIXING SYSTEMS


Print is a product designed to be mounted on the wall with one rail.



Metal rail (20 cm shorter than the nominal size of the ordered Print, but not longer than 2m)

- Wall mounting screws are not included in the fixing system set. Please elect sthe appropriate screws and plugs for the type of wall.
- The method of mounting the canvas in a wooden frame does not allow the fabric to be changed over time.

SOUND ABSORPTION COEFFICIENT α_s PER ISO 354

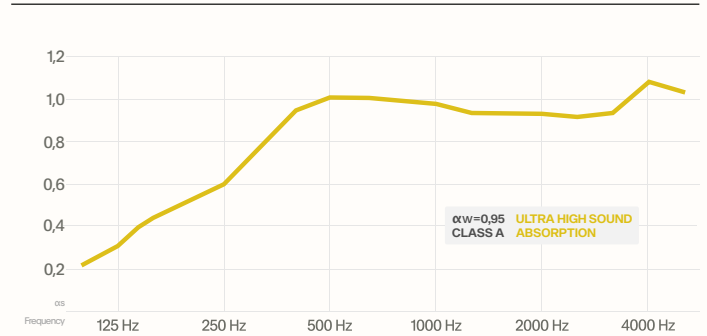

USAGE


- Open space
- Break-out area
- Conference room
- Reception
- Commercial space
- Lobby or foyer

PACKING

The dimensions of the packaging depend on the dimensions of the product ordered by the customer.

TECHNICAL REQUIREMENTS FOR PRINTING

- Files for printing should be sent to us via email or via Dropbox/Wetransfer
- Accepted file formats: Psd, Tiff, Eps, Ai, Cdr, Pdf
- Minimum recommended resolution of graphics is 150 dpi in the requested size – the higher the resolution the better the end result
- Please add 2 cm of print bleed around the graphics
- Colors should be prepared in CMYK color profile
- All fonts should be changed into vectors for better print quality











OPTION FOR PRINT WOOD

It is possible to order Print in a wooden frame without a graphic image, only with a pure blank fabric instead.

The selection of fabrics suited for this option is listed on the next page.

SELECTION OF FABRICS FOR PRINT WOOD WITHOUT PRINTED IMAGE

 THE ENTIRE COLOR PALETTE IS AVAILABLE ON [HTTPS://MUTE.DESIGN](https://mute.design)

NAME	PG	COMPOSITION	WEIGHT g/m ²	WIDTH mm	FLAMMABILITY	ABRASION RES. Martindale cycles	PILLING RES.
 ERA by Camira	1	100% polyester	320	140	BS EN 1021-1 BS EN 1021-2	100 k	4
 MEDLEY by Gabriel	2	100% polyester	364	140	BS EN 1021-1 BS EN 1021-2	75 k	5-7
 MICA by Gabriel		97% post-cons. recycled polyester, 3% polyester	218	140	BS EN 1021-1 BS EN 1021-2	60 k	4-5
 CHILI by Gabriel	3	75% post-cons. recycled polyester, 25% polyester	336	140	BS EN 1021-1 BS EN 1021-2 DIN 4102-B1	60 k	4-5
 SYNERGY by Camira		95% new wool, 5% polyamide	400	140	BS EN 1021-1 BS EN 1021-2	100 k	4
 REMIX 3 by Kvadrat	4	90% new wool, 10% nylon	300	140	BS EN 1021-1 BS EN 1021-2	100 k	3-4
 SELECT by Gabriel		85% New Zealand wool, 15% polyamide	364	140	BS EN 1021-1 BS EN 1021-2	200 k	4-5
 STEELCUT TRIO 3 by Kvadrat	5	90% new wool, 10% nylon	550	140	BS EN 1021-1 BS EN 1021-2	100 k	4

CARE

- Keep the product dry and away from air conditioning and ventilation syst.
- Keep away from direct sun light and heat sources
- Vacuum regularly